




Light alloy wheels for commercial vehicles and buses

22.5 x 9.00

22.5 x 8.25

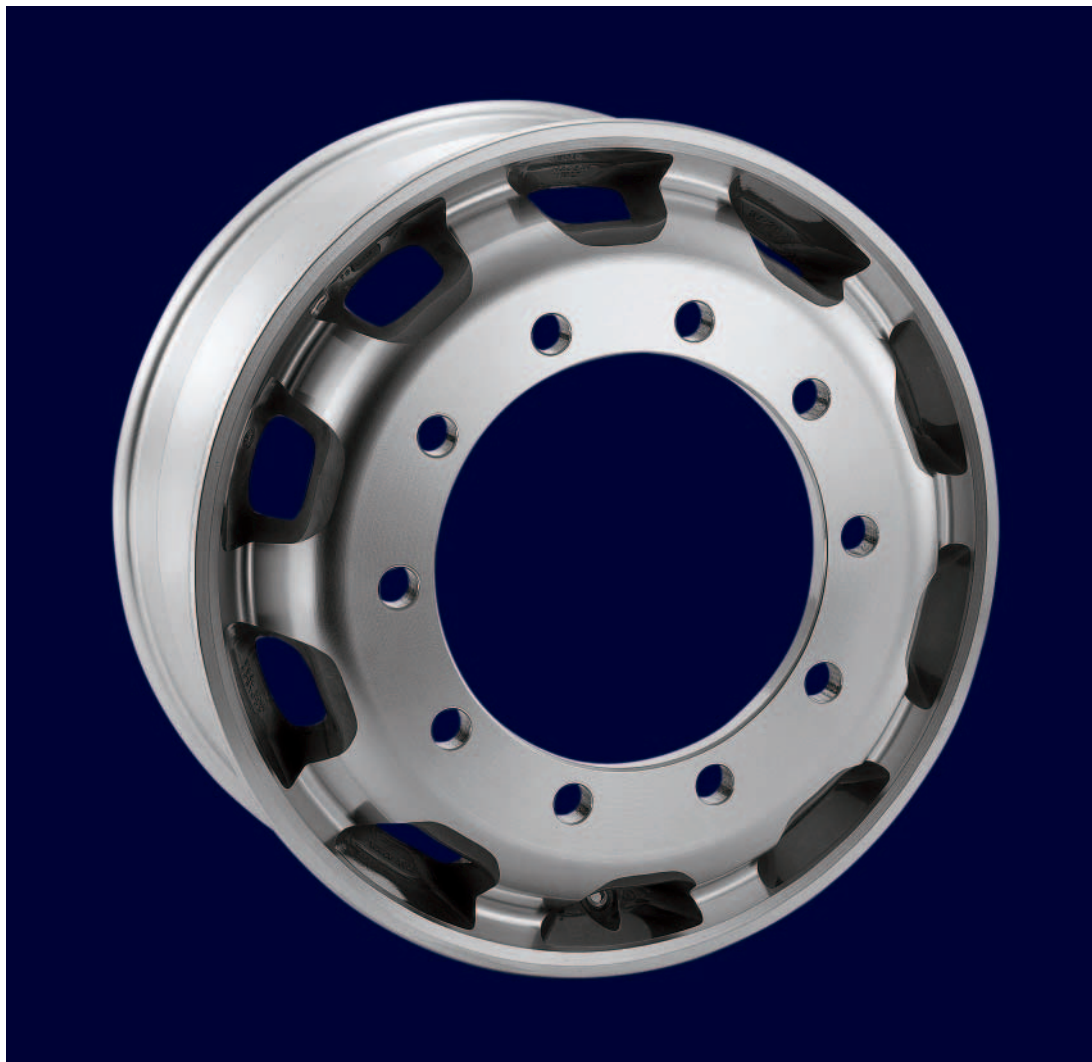

WHEEL CODE	RIM DIMENSION	AVERAGE WEIGHT (KG)	MAX. LOAD CAPACITY (KG)	ET (mm)	CENTRAL BORE Ø (mm)	PCD Ø (mm)	NO. OF BOLT HOLES	Ø BOLT HOLES (mm)	FLANGE THICKNESS (mm)
SL 830	22.5x 9.00	28	4000 (S)* 3350 (T)*	150.5	281	335	10	26 (A) 32 (B) 33 (C)	24.5
SL 905	22.5x8.25	26	3550 (S)* 3250 (T)*	146.5	281	335	10	26 (A) 32 (B) 33 (C)	22

***(S)**= single mounting; **(T)**= twin mounting

Wheels for tubeless tyres with "M" type fitting according to ISO standard 4107
The wheels are available with diamond finish and anti-corrosion protection **(D)** or painted **(V)**

Speedline



SL 830 / SL 905: Fitting and maintenance instructions

ABE - TÜV:

SL 830: KBA 42718; SL 905: KBA 42831

RECOMMENDED TYRES:

SL 830: 285/60 R 22.5, 285/70 R 22.5, 285/75 R 22.5, 285/80 R 22.5, 12 R 22.5, 295/60 R 22.5, 295/70 R 22.5, 295/75 R 22.5, 295/80 R 22.5, 13 R 22.5, 305/60 R 22.5, 305/70 R 22.5, 305/75 R 22.5, 305/80 R 22.5, 315/60 R 22.5, 315/70 R 22.5, 315/75 R 22.5, 315/80 R 22.5

SL 905: 265/60 R 22.5, 255/70 R 22.5, 255/75 R 22.5, 255/80 R 22.5, 11 R 22.5, 285/60 R 22.5, 265/70 R 22.5, 265/75 R 22.5, 265/80 R 22.5, 12 R 22.5, 275/70 R 22.5, 275/75 R 22.5, 275/80 R 22.5, 285/70 R 22.5, 285/75 R 22.5, 285/80 R 22.5, 295/70 R 22.5, 295/75 R 22.5, 295/80 R 22.5, 305/70 R 22.5, 305/75 R 22.5, 305/80 R 22.5

RECOMMENDED VALVE SETTING TORQUE (Speedline code 18.190.010, NICKEL-PLATED): 9-14 Nm

MAX PRESSURE: 9.5 BAR (or according to the tyre manufacturer's indication, when lower)

BALANCING OF WHEEL/TYRE-UNIT: use only self adhesive counterweights

RECOMMENDED NUT TORQUE (M22 x 1.5, 7/8" - 11 BSF, 7/8" - 14 UNF): 600 Nm

TYPE "A" FITTING

Speedline wheels are designed to be mounted on the vehicle hubs using type "M" fitting (see diagram 1) according to the ISO 4107 standard which requires the wheel to be centered on the hub and fixed with a nut that has a plain revolving washer. Since the flange of an alloy wheel is thicker than that of a steel wheel, one needs to check if the vehicle can be fitted with SL 830/SL 905 alloy wheels. It must have:

1. Adequate hub centering of at least 10 mm for single mounting and 30 mm for twin mounting.
2. The length of stud bolts from the hub surface equal to total thickness of nut and flange - 2 flanges in dual configuration - according to the DIN 74361 standard, part. 3.

TYPE "B" FITTING

In case the hub is not designed to be fitted with alloy wheels and one does not want to replace studbolts, Speedline proposes an alternative solution that has also been approved by TÜV, the German homologation institute (see diagram 2):

1. Special nuts with threaded extension (M22 x 1.5, 7/8" - 11 BSF, 7/8" - 14 UNF).
2. Wheels with larger fixing holes (B= Ø 32 mm, for special nuts M22 x 1.5; C= Ø 33 mm, for special nuts M22 x 1.5; C= Ø 33 mm, for special nuts 7/8" - 11 BSF or 7/8" - 14 UNF).
3. Specific centring tool to simplify twin-tyre fitting. This extension is inserted into the fixing hole thus enabling precise centring and wheel fixing.

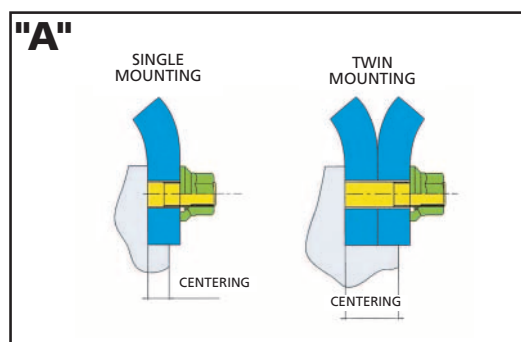


DIAGRAM 1

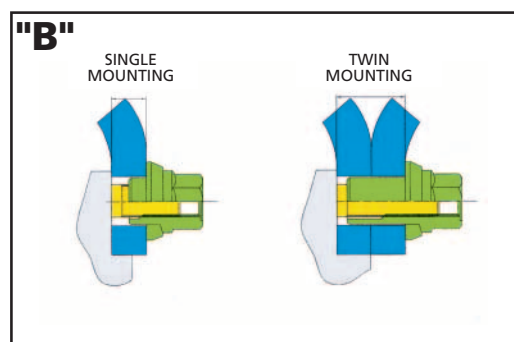


DIAGRAM 2

Verify that the nuts have an adequate number of engaging threads to tighten the stud: 13 for M22 x 1.5 (ca 20 mm), 8 for 7/8" - 11 BSF (ca. 19 mm), 12 for 7/8" - 14 UNF (ca. 22 mm).

STANDARD MAINTENANCE

In order to safeguard the quality of painting, it is necessary to eliminate deposits of grime, especially substances that with time could cause superficial corrosion (e. g. salt, highly alkaline substances, brakedust). With regard to this, we recommend that you first remove the " heaviest " grime with a hose or pressure washer, making sure that the wheel is not overheated before being washed and that water temperature is not over 50° (if a pressure washer is used, always keep moving the jets). When the heaviest grime is removed, wipe the wheels with a soft sponge or cloth and use an appropriate detergent (it must be a non-abrasive and low alkaline cleaner); use the recommended quantities and after cleaning, immediately rinse the wheel with fresh water. Never use organic solvents as they may badly damage the finish. Avoid polishing.

CAUTION

For tyre and wheel fitting do not use lubricants that contains water, copper and/or hydrocarbon. Avoid using rusty nuts and studs.

When tyres are replaced, we recommend to observe the following instructions: 1. clean the valve seat, 2. replace the valve with a brand new, original Speedline one, 3. check the torque value required for the valve nut. The observation of this procedure will assure you a correct elasticity of the rubber seal over the time, averting pressure leak when in service.

It is absolutely not allowed to weld Speedline alloy wheels.

Speedline declines all responsibility for any printing errors.