


BPW Steering Axles with Hollow Axle Beam

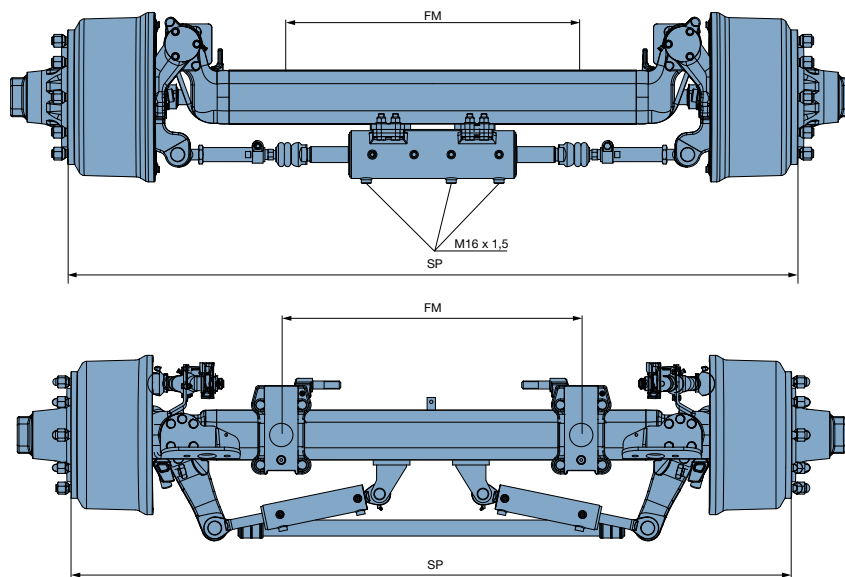

Axle cross-section (mm)	Axle type	Wheel brake	Track width SP (mm)	Wheel connection	Axle load		BPW code	BPW code for front axle on tri-axle
					25 km/h	40 km/h		

Braked single cylinder steering axles

120 x 15	GSLA 11010	FL4112	1,950	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.900	-
120 x 15	GSLA 11010	FL4112	2,050	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.804	-
120 x 15	GSLA 11010	FL4112	2,150	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.904	-
120 x 15	GSLA 11010	FL4112	2,225	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.905	-
150 x 16	GS(H)LL 12010	FL4118	1,950	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.710	-
150 x 16	GS(H)LL 12010	FL4118	2,050	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.617	-
150 x 16	GS(H)LL 12010	FL4118	2,150	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.737	-
150 x 16	GS(H)LL 12010	FL4118	2,225	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.742	-
150 x 16	GS(H)LL 14010	FL4118	1,950	10/335/280 M22 x 1.5	16,000	15,000	36.74.449.600	-
150 x 16	GS(H)LL 14010	FL4118	2,050	10/335/280 M22 x 1.5	16,000	15,000	36.74.449.604	-
150 x 16	GS(H)LL 14010	FL4118	2,150	10/335/280 M22 x 1.5	16,000	15,000	36.74.449.608	-
150 x 16	GS(H)LL 14010	FL4118	2,950	10/335/280 M22 x 1.5	16,000	15,000	36.74.449.008	-

Braked steering axles for positive steering

120 x 15	GSL 11010	FL4112	1,950	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.906	36.88.460.907
120 x 15	GSL 11010	FL4112	2,050	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.528	36.88.460.911
120 x 15	GSL 11010	FL4112	2,150	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.914	36.88.460.915
120 x 15	GSL 11010	FL4112	2,225	10/335/280 M22 x 1.5	12,000	10,500	36.88.460.916	36.88.460.917
150 x 16	GSL 12010	FL4118	2,050	10/335/280 M22 x 1.5	12,000	12,000	36.72.449.589	26.72.449.930
150 x 16	GSL 12010	FL4118	2,150	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.586	26.72.449.587
150 x 16	GSL 12010	FL4118	2,225	10/335/280 M22 x 1.5	12,000	12,000	26.72.449.588	26.72.449.589

Spring seats or cylinder brackets available on request

Optional 13t steering axles with cast steel steering available